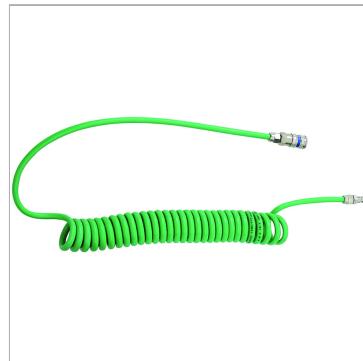


Характеристики

Спиральный шланг Polyurethane

Рабочее давление max. 10 bar (to the temperature +20 °C);
max. 7 bar (at temperature +40 °C); max. 5
bar (at temperature +60 °C)

**Дополнительная
информация** Hochwertige Einhand-
Schnellverschlusskupplung aus Stahl für
hohe Durchflusswerte
Für anspruchsvolle Anwendungen mit
hohem mechanischem Verschleiß

**Информация о продукте**

Ø спирали 65 mm

Размер шланга 12 mm x 8 mm

Размер шланга 12 mm x 8 mm

Рабочая длина 8 m

Указания

Прочие данные только по запросу.

Описание

For pneumatic applications in challenging industrial environments. High-quality, one-hand quick disconnect coupling made of steel with safety lock to prevent unintentional disconnection. For complex applications susceptible to severe mechanical wear. The outer layer of the hose, which is designed to withstand flying sparks and scorching, has special spark protection. It is therefore ideal for all pneumatic tools used in welding processes.

Дополнительная информация

High quality hand quick release coupling of steel for high flow ratesFor demanding applications with high mechanical wear