


## Short-stroke cylinders, single-acting (pressureless in the retracted position), with magnet, non-cushioned, with female thread, »ASQ« Series

### Характеристики

|                                  |   |
|----------------------------------|---|
| <b>Рабочие среды</b>             | Filtered, unlubricated or lubricated compressed air. If lubrication is used, it must be continuous.   |
| <b>Рабочее давление</b>          | 1 - 10 bar (double-acting); 2 - 10 bar (single-acting)  |
| <b>Область температур</b>        | -20 °C to +80 °C  |
| <b>Поршневой шток</b>            | gehärteter Stahl, hartverchromt   |
| <b>Поршни</b>                    | Brass (12 to 16 mm); Aluminium (20 to 100 mm)   |
| <b>Труба цилиндра</b>            | алюминий  |
| <b>Уплотнение</b>                | Нитрильный каучук   |
| <b>Дополнительная информация</b> | Wichtiger Hinweis: Stecker im Lieferumfang nicht enthalten. Bitte separat mitbestellen.<br>Weitere Kolben-Ø und Hub-Ausführungen auf Anfrage. |

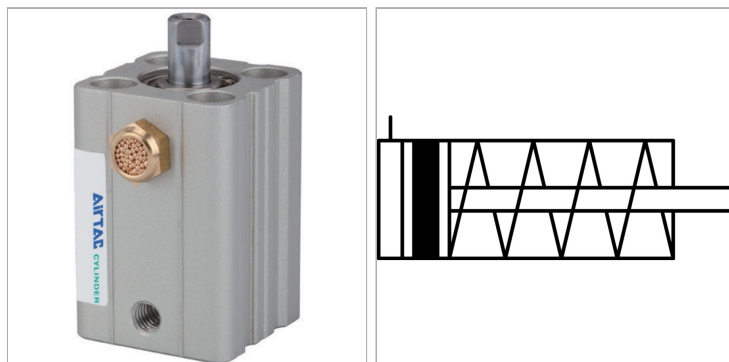

### Информация о продукте

|                           |       |   |           |
|---------------------------|-------|---|-----------|
| <b>Ø поршня</b>           | 16 mm | <b>Ø поршневого штока</b>                 | 8 mm      |
| <b>Ход</b>                | 10 mm | <b>Конструкция</b>                        | 4         |
| <b>Ø поршневого штока</b> | 8 mm  | <b>Резьба поршневого штока внутренняя</b> | M 4 x 0,7 |

### Описание

Specially for use where space is in short supply. Version with magnetic piston. Short-stroke cylinder in two different versions: Series "ACQ", double-acting, Ø 12 - 100Series "ASQ", single-acting, Ø 12 - 63

### Дополнительная информация

Important: The scope of supply does not include a connector. Please order separately. Other piston-Ø and stroke versions available on request.