


Short-stroke cylinders, single-acting (pressureless in the retracted position), with magnet, non-cushioned, with female thread, »ASQ« Series

Характеристики

| | |
|----------------------------------|---|
| Рабочие среды | Filtered, unlubricated or lubricated compressed air. If lubrication is used, it must be continuous. |
| Рабочее давление | 1 - 10 bar (double-acting); 2 - 10 bar (single-acting) |
| Область температур | -20 °C to +80 °C |
| Поршневой шток | gehärteter Stahl, hartverchromt |
| Поршни | Brass (12 to 16 mm); Aluminium (20 to 100 mm) |
| Труба цилиндра | алюминий |
| Уплотнение | Нитрильный каучук |
| Дополнительная информация | Wichtiger Hinweis: Stecker im Lieferumfang nicht enthalten. Bitte separat mitbestellen. Weitere Kolben-Ø und Hub-Ausführungen auf Anfrage. |

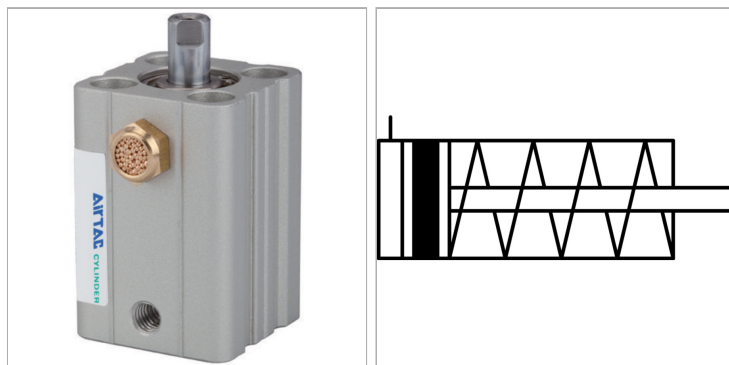

Информация о продукте

| | | | |
|---------------------------|-------|---|-----------|
| Ø поршня | 20 mm | Ø поршневого штока | 10 mm |
| Ход | 10 mm | Конструкция | 5 |
| Ø поршневого штока | 10 mm | Резьба поршневого штока внутренняя | M 5 x 0,8 |

Описание

Specially for use where space is in short supply. Version with magnetic piston. Short-stroke cylinder in two different versions: Series "ACQ", double-acting, Ø 12 - 100Series "ASQ", single-acting, Ø 12 - 63

Дополнительная информация

Important: The scope of supply does not include a connector. Please order separately. Other piston-Ø and stroke versions available on request.