


## Round cylinders, single-acting (pressureless in the retracted position), with magnet, non-cushioned, »MSI« Series

### Series

#### Характеристики

<b>Рабочие среды</b>	Filtered, unlubricated or lubricated compressed air. If lubrication is used, it must be continuous.
<b>Рабочее давление</b>	1 - 10 bar (double-acting); 2 - 10 bar (single-acting)
<b>Область температур</b>	-20 °C to +70 °C
<b>Поршневой шток</b>	Stainless steel 1.4301
<b>Исполнение</b>	Type "CA" = ground cover with threaded pin - swivel design Type "CM" = ground cover with threaded pin round - swivel design
<b>Поршни</b>	Stainless steel 1.4305 (8 to 12 mm); Alu (16 to 40 mm)
<b>Труба цилиндра</b>	Stainless steel 1.4301
<b>Уплотнение</b>	Нитрильный каучук

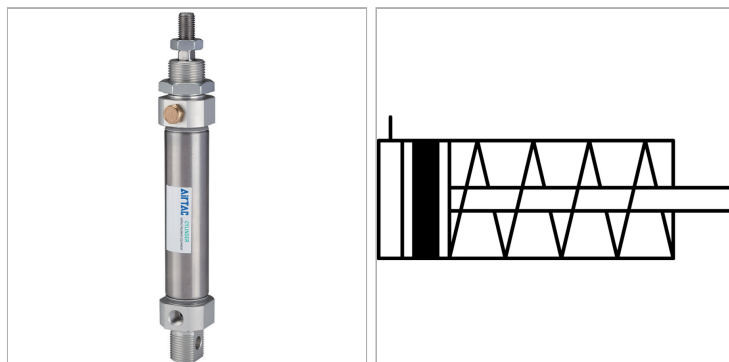

#### Информация о продукте

<b>Ø поршня</b>	32 mm	<b>Ø поршневого штока</b>	12 mm
<b>Ход</b>	15 mm	<b>Исполнение</b>	»CM« type
<b>Ø поршневого штока</b>	12 mm	<b>Внешняя резьба поршневого штока</b>	M 10 x 1,25

#### Указания

Прочие данные только по запросу.

#### Описание

Series "MSI" single-acting, pressureless retraction, Ø 8 - 40