


Характеристики

| | |
|----------------------------------|---|
| Рабочие среды | Filtered, unlubricated or lubricated compressed air. If lubrication is used, it must be continuous. |
| Рабочее давление | Max. vacuum 10 bar (external pilots), 3 to 7 bar (internal pilots as standard) |
| Управляющее давление | 3 - 7 bar |
| Область температур | -10 °C to +60 °C |
| Потребляемая мощность | 0.6 W per pilot |
| Расход пот. | 800 l/min |
| Степень защиты | IP 65 |
| Дополнительная информация | <p>Wichtiger Hinweis: Stecker im Lieferumfang nicht enthalten. Bitte separat mitbestellen.</p> <p>Anzahl der Ansteuerungen bis 16 Betätigungen (z. B. 16 federrückgestellte Ventile).</p> <p>Handhilfsbetätigung rastend (bistabil), auf Anfrage in monostabiler Ausführung (tastend) lieferbar</p> |

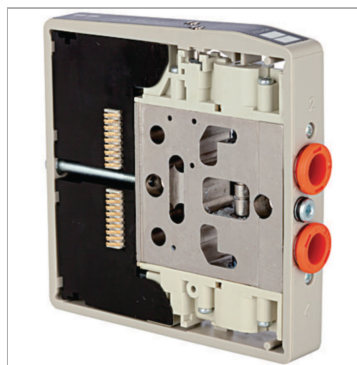

Информация о продукте

| | |
|----------------|------------------------------|
| Функция | 5/3-way, mid-position closed |
|----------------|------------------------------|

| | |
|----------------|------------------------------|
| Функция | 5/3-way, mid-position closed |
|----------------|------------------------------|

Указания

Прочие данные только по запросу.

Описание

These compact valve terminals, with a maximum flow rate of 800 NI/min, can be individually adapted to the specific conditions of each application thanks to the wide range of functions and various input and intermediate plates. Since each valve terminal is a customer-specific combination of a series of individual elements, the catalogue only lists the available input, intermediate and end plates as well as the different valve discs and the 25-pin multi-pole connectors.

Дополнительная информация

Important: The scope of supply does not include a connector. Please order separately. Max. 16 (e.g. 16 spring return valves) working pressure. Manual control Latching (bistable), Monostable (non-latching) version also available on request