


Filter regulators with polycarbonate bowl, bowl guard and pressure gauge

Обновлено: 04.10.24

Характеристики

Уплотнение	Нитрильный каучук
------------	-------------------

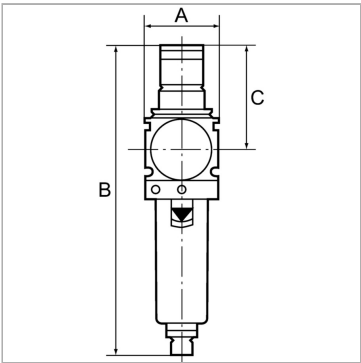

Информация о продукте

Расход ном.	5500 l/min
-------------	------------

Расход ном.	5500 l/min
-------------	------------

Указания

Прочие данные только по запросу.

Описание

Reversible diaphragm pressure regulators, independent of inlet pressure, with self-relieving design, combined with a centrifugal separator. The pressure setting can be locked by pushing the knob down. Approved series in modern industrial design, with the following key benefits: Simple handling, Convenient modular assembly thanks to innovative fasteners, Excellent flow values.

Указание по заказу

Filter regulators are also available with bowl guard or metal bowl. Filter regulators are also available in lockable version. Please ask for more information.

Дополнительная информация

Filter regulators are also available with bowl guard or metal bowl. Filter regulators are also available in lockable version. Please ask for more information.