


Unidirectional flow control valves with outgoing air restriction, adjustable with knurled screw, angled, swivel type, conical male thread, coated

Характеристики

| | |
|-----------------------------------|--|
| Рабочее давление | Max. 15 bar, coarse vacuum |
| Область температур | -20 °C to +80 °C |
| Рабочие среды | Compressed air and all gases or liquids that are compatible with the materials |
| рекомендуемые шланги | PU or PA (nylon) |
| Область применения | Air, vacuum |
| Уплотнительная поверхность | Parallel version: O-ring in housing, Conical version: thread coating |
| Материал | Plastic, Nickel plated brass |
| Прижимное кольцо | Plastic |

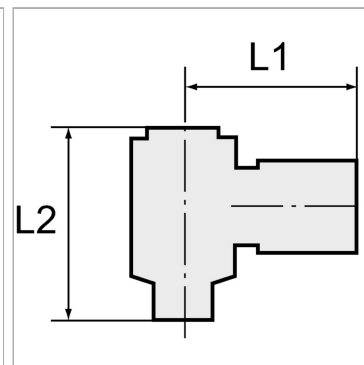

Информация о продукте

| | |
|-------------------------------|-------|
| Резьба | R 1/4 |
| для наружного Ø шланга | 12 mm |
| L1 | 32 mm |

| | |
|-----------------|-------|
| L2 мин. | 44 mm |
| L2 макс. | 51 mm |
| SW | 14 mm |

Указания

Прочие данные только по запросу.

Описание

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.