


## Weld-on sleeve 16 made of black steel ST 37-2, DIN 2986 with continuous thread

Обновлено: 04.29.24

### Характеристики

|                       |                     |
|-----------------------|---------------------|
| Рабочее давление      | Max. 50 bar         |
| Соединительная резьба | nach ISO 7-1        |
| Материал              | black steel ST 37-2 |

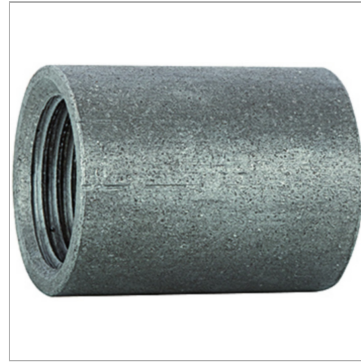

### Информация о продукте

|        |         |       |       |
|--------|---------|-------|-------|
| Резьба | R 1 1/4 | Длина | 48 mm |
|--------|---------|-------|-------|

### Указания

Прочие данные только по запросу.

### Описание

The steel fittings are made of tubular steel to DIN 2441 and boast good resistance to mechanical stresses. Hot dip galvanised steel fittings are completely coated with a layer of pure zinc and are therefore suitable for drinking water. They are also protected against rust. They are used in pipe construction, plumbing and gas installations as well as a wide range of industrial applications, especially in conjunction with the popular malleable iron series.