

Basic ejectors »SBP-C« with blow-off valve, with integrated silencer

Обновлено: 04.26.24

Характеристики

Свойства	<p>Maximum suction capacity with minimum compressed air consumption</p> <p>Minimum size, low weight</p> <p>Vacuum generator with a single nozzle, available in six power ratings, with a high maximum vacuum value (85%)</p> <p>Connection of compressed air and vacuum with push-in coupling</p> <p>Basic housing with connection facility for a vacuum switch</p> <p>Various power ratings for optimised air consumption</p>
-----------------	--


Применение	<p>For universal use in handling systems with very high dynamic movements</p> <p>Handling all kinds of air-tight components</p> <p>For use in separation systems where space is restricted.</p> <p>Construction of ejector blocks for centralised or decentralised individual control of suction pads.</p>
-------------------	--

Система форсунок	Brass
-------------------------	-------

Соединение	Push-in coupling
-------------------	------------------

Глушитель	Plastic
------------------	---------

Основные части	Impact-resistant plastic
-----------------------	--------------------------

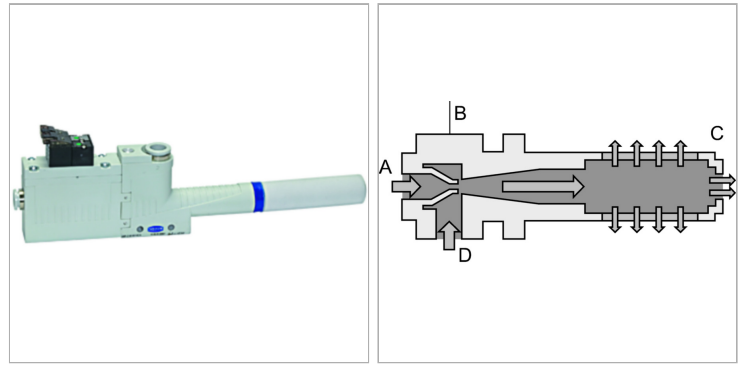

Информация о продукте

Размер форсунки	1
Состояние покоя всасывающего клапана	NO
Подключение системы сжатого воздуха	6 mm

Подключение системы сжатого воздуха	6 mm
Вакуумное соединение	8 mm
Размер	142 mm x 15 mm x 50 mm

Указания

Прочие данные только по запросу.

Описание

Purely pneumatic vacuum ejector that operates on the Venturi principle. Compressed air enters the ejector at A and flows through the nozzle B. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet D. This air and the driving air leave the ejector via the silencer C.