


Basic ejector »SBP-C« with blow-off valve and electronic vacuum switch, with integrated silencer

Обновлено: 04.10.24

Характеристики

Свойства	Maximum suction capacity with minimum compressed air consumption Minimum size, low weight Vacuum generator with a single nozzle, available in six power ratings, with a high maximum vacuum value (85%) Connection of compressed air and vacuum with push-in coupling Basic housing with connection facility for a vacuum switch Various power ratings for optimised air consumption
Применение	For universal use in handling systems with very high dynamic movements Handling all kinds of air-tight components For use in separation systems where space is restricted. Construction of ejector blocks for centralised or decentralised individual control of suction pads.
Система форсунок	Brass
Соединение	Push-in coupling
Глушитель	Plastic
Основные части	Impact-resistant plastic

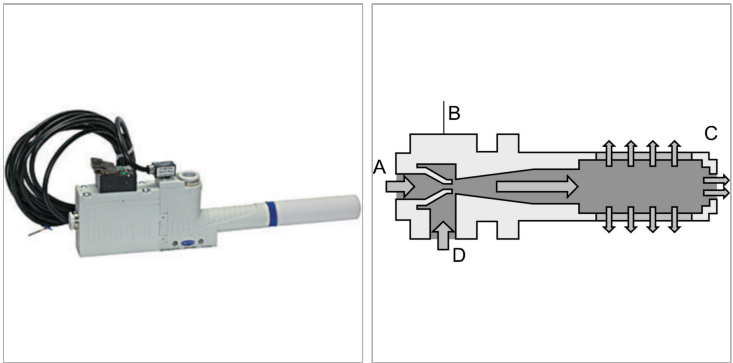

Информация о продукте

Размер форсунки	2	Подключение системы сжатого воздуха	6 mm
Состояние покоя всасывающего клапана	NO	Вакуумное соединение	8 mm
Подключение системы сжатого воздуха	6 mm	Размер	142 mm x 15 mm x 50 mm

Указания

Прочие данные только по запросу.

Описание

Purely pneumatic vacuum ejector that operates on the Venturi principle. Compressed air enters the ejector at A and flows through the nozzle B. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet D. This air and the driving air leave the ejector via the silencer C.