

Характеристики


Свойства	No moving parts, which means no wear and no maintenance Vacuum generator with high maximum vacuum level (85% vacuum) ultra small footprint, suitable for confined spaces minimal air consumption
-----------------	---

Применение	by screwing / plugging into the distribution beam direct attachment to the suction pad for handling various workpieces
-------------------	--

Корпус	plastic (Typ SLP)
---------------	-------------------

Система форсунок	Brass (type VR)
-------------------------	-----------------

Соединение	thread connector
-------------------	------------------

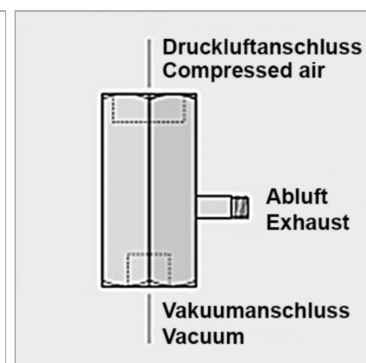

Информация о продукте

Размер форсунки	1
Подключение системы сжатого воздуха	4 mm
Вакуумное соединение	4 mm
Подключение к системе вытяжной вентиляции	-
Степень разрежения	85 %

Степень разрежения	85 %
Расход воздуха при всасывании	25 l/min
макс. скорость откачки	16 l/min
Длина	57 mm
Рабочее давление	4.5 bar

Указания

Прочие данные только по запросу.

Описание

For vacuum generation directly at the point of use. For direct installation between the suction pad and the compressed air supply. Purely pneumatic vacuum generator that operates on the Venturi principle. Compressed air enters the ejector and flows through a nozzle. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet. This air and the driving air leave the ejector and enter the atmosphere via the exhaust air outlet.