


## Compact ejectors »CP«, digital vacuum switch with air-saving function

Обновлено: 04.27.24

### Характеристики

<b>Свойства</b>	<p>Vacuum generator with integrated control valves and system monitoring functions</p> <p>Gripping and blowing off can be controlled without the need for external valves</p> <p>Optimised air consumption thanks to many models with differing suction capacities</p> <p>Minimum energy costs in continuous operation thanks to automatic air-saving</p> <p>Easy adjustment with foil keypad and LED display of the settings</p>
-----------------	---

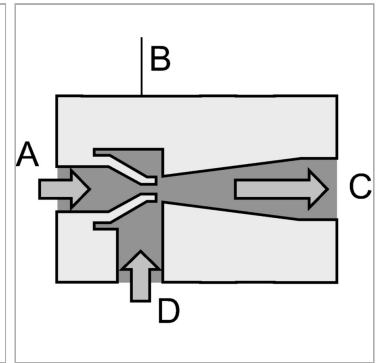

<b>Применение</b>	<p>Handling of air-tight or slightly porous workpieces in fully automated handling systems</p> <p>e.g. in the robotics, automotive, packaging, electronics, electrical engineering and metalworking industries</p>
-------------------	--

<b>Основные части</b>	Anodised aluminium
-----------------------	--------------------

<b>Дополнительная информация</b>	<p>Achtung: Bitte pro Ejektor immer 2 Anschlussstecker bestellen. Die Stecker/Kabel sind im Lieferumfang des Kompaktejektors mit Luftsparregelung bereits enthalten.</p> <p>Abblasventil NC, Filter, Schalldämpfer, Rückschlagventil Integriert.</p>
----------------------------------	--

### Информация о продукте

<b>Размер форсунки</b>	2	<b>Расход воздуха при всасывании</b>	117 l/min
<b>Состояние покоя всасывающего клапана</b>	NO	<b>макс. скорость откачки</b>	65 l/min
<b>Подключение системы сжатого воздуха</b>	G 1/8 IG	<b>Размер</b>	72 mm x 20 mm x 164 mm
<b>Вакуумное соединение</b>	G1/8 female	<b>Рабочее давление</b>	5 bar

### Указания

Прочие данные только по запросу. Mini-sensor with housing and connection cable, analogue or digital output signal. Minimum size and low weight combined with high measuring accuracy.

### Описание

Purely pneumatic vacuum ejector that operates on the Venturi principle. Compressed air enters the ejector at A and flows through the nozzle B. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet D. This air and the driving air leave the ejector via the silencer C.

### Дополнительная информация

Important: Order two connection plugs per ejector. A cable set is included with the compact ejector with automatic air-saving. NC blow-off valve, filter, silencer, non-return valve integrated.