


### Характеристики

|                 |  |
|-----------------|--|
| <b>Свойства</b> | <p>Vacuum generator with integrated control valves and system monitoring functions</p> <p>Gripping and blowing off can be controlled without the need for external valves</p> <p>Optimised air consumption thanks to many models with differing suction capacities</p> <p>Minimum energy costs in continuous operation</p> <p>Easy adjustment with foil keypad and LED display of the settings</p> <p>Minimum size, low weight</p> <p>Optimum vacuum generation directly on the suction pad</p> <p>Complete solution for very simple installation</p> <p>Short learning curve thanks to "teach" function</p> <p>No need for additional sensors</p> <p>Easily visible status indication</p> |
|-----------------|--|

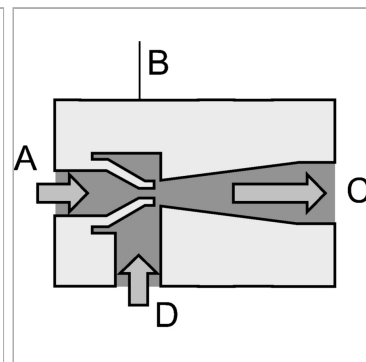

|                   |  |
|-------------------|--|
| <b>Применение</b> | <p>Ideal where space is restricted and for highly dynamic movements, handling with industrial robots, linear axes pick-and-place systems</p> |
|-------------------|--|

|                           |      |
|---------------------------|------|
| <b>Степень разрежения</b> | 85 % |
|---------------------------|------|

|                       |                    |
|-----------------------|--------------------|
| <b>Основные части</b> | Anodised aluminium |
|-----------------------|--------------------|

|                                  |   |
|----------------------------------|---|
| <b>Дополнительная информация</b> | <p>Achtung: Bitte pro Ejektor immer 2 Anschlussstecker bestellen.</p> <p>Abblasventil NC, Filter, Schalldämpfer, Rückschlagventil Integriert.</p> |
|----------------------------------|---|

### Информация о продукте

|   |           |
|---|-----------|
| <b>Размер форсунки</b>                      | 1         |
| <b>Состояние покоя всасывающего клапана</b> | NO        |
| <b>Подключение системы сжатого воздуха</b>  | M 5 IG    |
| <b>Вакуумное соединение</b>                 | M5 female |

|                                      |                        |
|--------------------------------------|------------------------|
| <b>Расход воздуха при всасывании</b> | 46 l/min               |
| <b>макс. скорость откачки</b>        | 23 l/min               |
| <b>Размер</b>                        | 65 mm x 10 mm x 107 mm |
| <b>Рабочее давление</b>              | 4.5 bar                |

### Указания

Прочие данные только по запросу. Mini-sensor with housing and connection cable, analogue or digital output signal. Minimum size and low weight combined with high measuring accuracy.

### Описание

Purely pneumatic vacuum generator that operates on the Venturi principle. Compressed air enters the ejector at A and flows through the nozzle B. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet D. This air and the driving air leave the ejector via the silencer C.

### Дополнительная информация

Important: Order two connection plugs per ejector. NC blow-off valve, filter, silencer, non-return valve integrated.