


Характеристики

Особые признаки	<p>very good adaptation to oblique workpiece surfaces</p> <p>automatic Rückstellung in die Ausgangslage</p> <p>vacuum-tight design with integrated protection against damage</p>
Применение	<p>For handling of workpieces with sloping using large-area vacuum gripper</p> <p>Handling of large plates that can sag when lifting</p> <p>In combination with spring plungers to compensate height-differences and Unevenness</p>

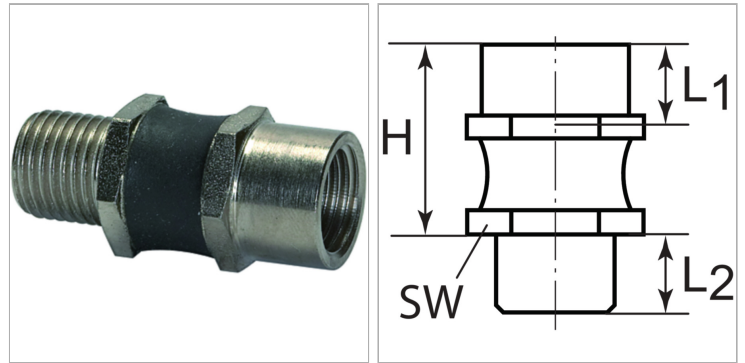

Информация о продукте

Резьба 1 внутренняя	G 1/4	L2	12 mm
Резьба 2 наружная	G 1/4	L1	12 mm
Материал	Steel, rubber	Угол W	12 °
Материал	Steel, rubber	Вертикальная нагрузка	750 N/m ²
H	27 mm	Момент изгиба	10 N/m ²
L2	12 mm	SW	17 mm

Указания

Прочие данные только по запросу.

Описание

Flexible suction pad mounting. By flexing in all directions, this mounting allows the suction pad to better adapt itself to sloping workpieces.