


# Booster Regulator, pressure gauge, elbow high-noise reduction silencer, VBA

Обновлено: 04.09.24

## Характеристики

<b>Исполнение</b>	with pressure gauge and with high performance muffler, angled
<b>Рабочие среды</b>	Сжатый воздух
<b>мин. рабочее давление</b>	0.2 MPa
<b>Количество соединений пневматических манометров</b>	2
<b>макс. входное давление</b>	0,1 to 1,0 MPa
<b>Температура окружающей среды</b>	+2 °C bis +50 °C
<b>Температура среды</b>	+2 °C bis +50 °C
<b>Дополнительная информация</b>	Rc 1/8 Anschluss Manometer pneumatisch

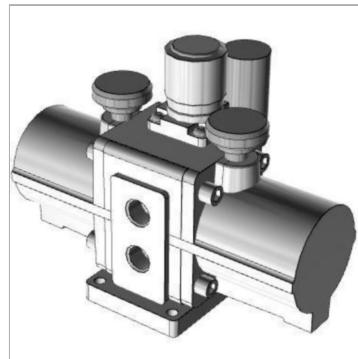

## Информация о продукте

<b>Соединение пневматическое</b>	G 1/4	<b>Расход пот.</b>	230 l/min
<b>Типоразмер</b>	1/4	<b>Коэффициент усиления давления</b>	1:2
<b>Макс. рабочее давление</b>	3 MPa	<b>Механизм регулировки давления</b>	manually operated

## Описание

Booster regulator, series VBA, increases pressure only where the force is inadequate because of a low network pressure (energy saving measure), no electricity supply necessary, longer service life: doubled compared to conventional model, lower operating noise level: 13 dB (A), improved operational reliability from inbuilt mesh filter on (IN connection) compressed air inlet, reduced condensation levels: air exhaust channels integrated directly into the cylinder tube, suitable for: compressed air, size 1/4, with pressure gauge and silencer, elbow, pneumatic connection: G 1/4, pneumatic connection pressure gauge: G 1/8, pneumatic connections pressure gauge: 2, flow rate 230 l/min, pressure boost 1:2, manually actuated pressure adjustment mechanism, test pressure: 3 MPa, max. operating pressure: 2 MPa, min. operating pressure: 0.2 MPa, media temperature: +2 to +50 °C, ambient temperature: +2 to +50 °C

## Дополнительная информация

Rc 1/8 port for pneumatic pressure gauge