


Booster Regulator, pressure gauge, high-noise reduction silencer, VBA

Характеристики

Исполнение	with pressure gauge and with high performance muffler
Рабочие среды	Сжатый воздух
мин. рабочее давление	0.2 MPa
Количество соединений пневматических манометров	2
макс. входное давление	0,1 to 1,0 MPa
Температура среды	+2 °C bis +50 °C
Температура окружающей среды	+2 °C bis +50 °C
Дополнительная информация	Rc 1/8 Anschluss Manometer pneumatisch

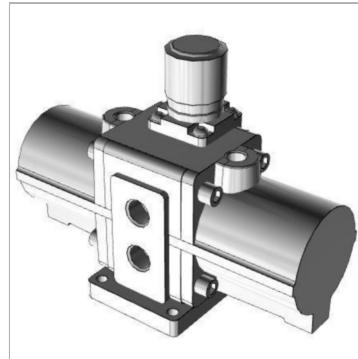

Информация о продукте

Соединение пневматическое	G 3/8	Расход пом.	1000 l/min
Типоразмер	3/8	Механизм регулировки давления	manually operated
Макс. рабочее давление	1.5 MPa	Коэффициент усиления давления	1:2

Описание

Booster regulator, series VBA, increases pressure only where the force is inadequate because of a low network pressure (energy saving measure), no electricity supply necessary, longer service life: doubled compared to conventional model, lower operating noise level: 13 dB (A), improved operational reliability from inbuilt mesh filter on (IN connection) compressed air inlet, reduced condensation levels: air exhaust channels integrated directly into the cylinder tube, suitable for: compressed air, size 1/4, with pressure gauge and silencer, elbow, pneumatic connection: G 1/4, pneumatic connection pressure gauge: G 1/8, pneumatic connections pressure gauge: 2, flow rate 230 l/min, pressure boost 1:2, manually actuated pressure adjustment mechanism, test pressure: 3 MPa, max. operating pressure: 2 MPa, min. operating pressure: 0.2 MPa, media temperature: +2 to +50 °C, ambient temperature: +2 to +50 °C

Дополнительная информация

Rc 1/8 port for pneumatic pressure gauge