ATSE

Гофрированный шланг из PTFE

Обновлено: 04.28.24

Характеристики

Применение	medium pressure applications with different media including aggressive media
Область применения	mainly for the chemical and food industries, and pharmaceutical plants
Исполнение	coil-corrugated white PTFE inliner with carbon components antistatic design
Материал шланга	PTFE (политетрафторэтилен)
Свойства	Due to the wide curl good self-cleaning properties The base material has an FDA-approval, EG 1935/2004 and EU 10/2011.
Оплетка	1 оплетка из 1.4301 / 1.4306
Температура min.	-70 °C
Температура макс.	260 °C
Температура	только для шланга
Допуск	The base material has an FDA-approval, EG 1935/2004 and EU 10/2011.

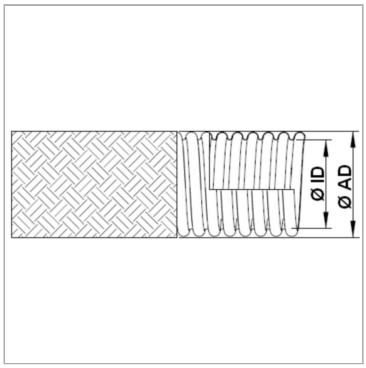

Указания

Приведенные значения давления относятся только к шлангам.От 120 °C учитывать коэффициент уменьшения давления.(Макс. рабочее давление = рабочее давление x коэффициент).

Темп.: 120 °C / 140 °C / 160 °C / 180 °C / 200 °C / 220 °CКоэф.: 1,00 / 0,80 / 0,60 / 0,40 / 0,20 / 0,00

Указание по заказу

Другие варианты исполнения по запросу

Артикул

Наименование	Внутренний Ø min.	Внутренний Ø макс.	Наружный Ø Мин.	Наружный Ø макс.	Рабочее давление при 20°C (стат.)	Толщина стенок	Испытательное давление	Продавливающее усилие	Мин. радиус изгиба	Вес на м
ATSE006	6,1	6,7	9,3	9,9	172,0	0,75	258,0	516,0	18	0,140
ATSE008	7,9	8,5	12,3	12,9	138,0	0,60	207,0	414,0	20	0,160
ATSE010	9,5	10,2	12,8	14,5	138,0	0,65	207,0	414,0	20	0,152
ATSE013	12,5	13,1	17,8	19,2	103,0	0,80	154,5	309,0	25	0,253
ATSE016	15,7	16,4	21,8	24,0	83,0	0,80	124,5	249,0	51	0,304
ATSE020	19,0	19,7	24,0	27,0	69,0	1,00	103,5	207,0	64	0,374
ATSE025	25,5	26,2	32,2	36,1	46,0	1,00	69,0	138,0	89	0,543
ATSE032	32,0	32,5	40,2	41,3	34,0	1,00	51,0	102,0	125	0,635
ATSE040	38,0	38,9	47,8	49,0	30,0	1,00	45,0	90,0	152	0,840
ATSE050	50,9	51,9	60,5	62,3	23,0	1,10	34,5	69,0	200	1,000

Несмотря на тщательную проверку, мы не может исключить ошибки, поэтому
мы не берем на себя ответственность за содержащуюся информаци

© hansa-flex.com.ua