


Shut-off valves, male thread, plug connection, flow direction to tube, conical thread, coated

Обновлено: 05.06.24

Характеристики

| | |
|-----------------------------------|--|
| Рабочее давление | Max. 15 bar, coarse vacuum |
| Область температур | -20 °C to +80 °C |
| Рабочие среды | Compressed air and all gases or liquids that are compatible with the materials |
| рекомендуемые шланги | PU or PA (nylon) |
| Область применения | Air, vacuum |
| Уплотнительная поверхность | Parallel version: O-ring in housing, Conical version: thread coating |
| Материал | Plastic, Nickel plated brass |
| Прижимное кольцо | Plastic |

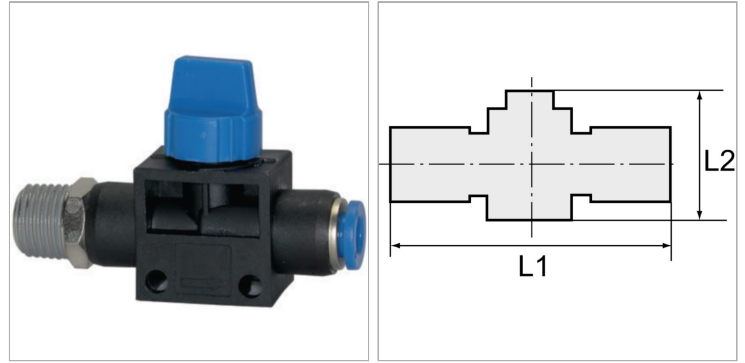

Указания

Прочие данные только по запросу.

Описание

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Артикул

| Наименование | Резьба | L1 | L2 |
|----------------------------|--------|------|------|
| K-07400790 | R 1/8 | 58,0 | 42,6 |
| K-07400791 | R 1/8 | 58,9 | 42,6 |
| K-07400788 | R 1/4 | 60,5 | 42,6 |
| K-07400789 | R 1/4 | 60,9 | 42,6 |
| K-07400786 | R 1/4 | 72,4 | 47,0 |
| K-07400787 | R 1/4 | 73,3 | 47,0 |
| K-07400794 | R 3/8 | 62,4 | 42,6 |
| K-07400792 | R 3/8 | 73,4 | 47,0 |
| K-07400793 | R 3/8 | 74,3 | 47,0 |
| K-07400784 | R 1/2 | 76,9 | 47,0 |
| K-07400785 | R 1/2 | 77,3 | 47,0 |