


Shut-off valves, male thread, plug connection, flow direction to tube, parallel thread with O-ring

Обновлено: 05.06.24

Характеристики

Рабочее давление	Max. 15 bar, coarse vacuum
Область температур	-20 °C to +80 °C
Рабочие среды	Compressed air and all gases or liquids that are compatible with the materials
рекомендуемые шланги	PU or PA (nylon)
Область применения	Air, vacuum
Уплотнительная поверхность	Parallel version: O-ring in housing, Conical version: thread coating
Материал	Plastic, Nickel plated brass
Прижимное кольцо	Plastic

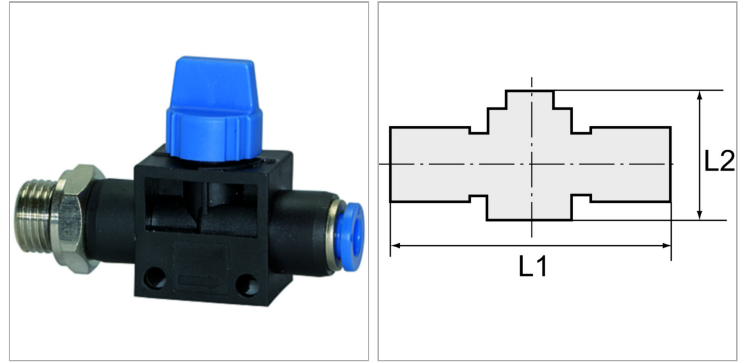

Указания

Прочие данные только по запросу.

Описание

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Артикул

Наименование	Резьба	L1	L2
K-07400801	G 1/8	58,0	42,6
K-07400802	G 1/8	58,4	42,6
K-07400799	G 1/4	59,8	42,6
K-07400800	G 1/4	59,9	42,6
K-07400797	G 1/4	70,9	47,0
K-07400798	G 1/4	70,9	47,0
K-07400805	G 3/8	61,4	42,6
K-07400803	G 3/8	72,4	47,0
K-07400804	G 3/8	71,9	47,0
K-07400795	G 1/2	75,9	47,0
K-07400796	G 1/2	75,4	47,0