


Характеристики

Рабочее давление	2 - 25 bar
Измерение расхода воздуха	At P1 = 6 bar and pressure drop Δp = 1 bar

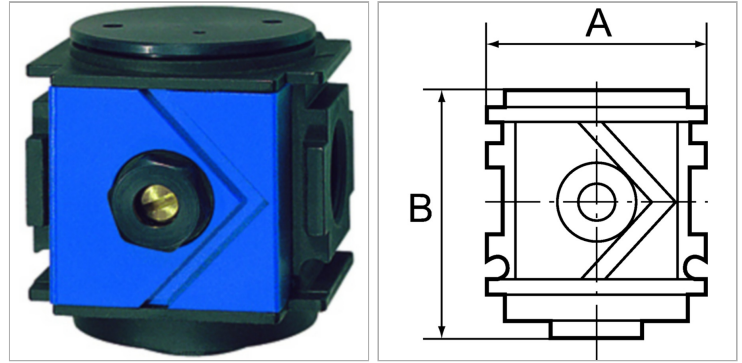

Указания

Прочие данные только по запросу.

Описание

For slow pressure build-up in pneumatic systems, e.g. after an emergency stop. The valve opens to full flow at approximately 60% of the set operating pressure.

The filling time can be set by turning the adjusting screw. Used in combination with multi-piece service units.

Артикул

Наименование	Резьба	Расход пот.	A	B
K-07251184	G 1/4	1200	48,0	54,0 mm
K-07251185	G 3/8	1400	48,0	54,0 mm
K-07251186	G 1/2	3800	70,0	72,0 mm
K-07251187	G 3/4	4200	70,0	72,0 mm
K-07251188	G 1	4200	124,0	72,0 mm