


Unidirectional flow control valves with outgoing air restriction, adjustable with knurled screw, angled, swivel type, parallel male thread with O-ring

Характеристики

Рабочее давление	Max. 15 bar, coarse vacuum
Область температур	-20 °C to +80 °C
Рабочие среды	Compressed air and all gases or liquids that are compatible with the materials
рекомендуемые шланги	PU or PA (nylon)
Область применения	Air, vacuum
Уплотнительная поверхность	Parallel version: O-ring in housing, Conical version: thread coating
Материал	Plastic, Nickel plated brass
Прижимное кольцо	Plastic

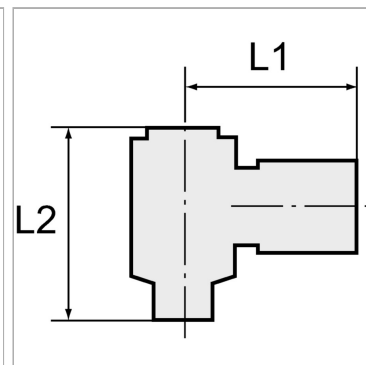

Указания

Прочие данные только по запросу.

Описание

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Артикул

Наименование	Резьба	L1	L2 макс.	L2 мин.
K-07400756	M 5	20,0	31,9	29,0
K-07400757	M 5	21,7	31,9	29,0
K-07400767	G 1/8	22,3	44,0	37,8
K-07400768	G 1/8	22,9	44,0	37,8
K-07400769	G 1/8	25,3	44,0	37,8
K-07400766	G 1/8	30,1	44,0	37,8
K-07400763	G 1/4	24,0	51,0	44,0
K-07400764	G 1/4	24,9	51,0	44,0
K-07400765	G 1/4	28,4	51,0	44,0
K-07400761	G 1/4	32,0	51,0	44,0
K-07400762	G 1/4	32,0	51,0	44,0
K-07400772	G 3/8	29,3	55,0	48,7
K-07400770	G 3/8	32,5	55,0	48,7
K-07400771	G 3/8	35,3	55,0	48,7
K-07400760	G 1/2	32,3	59,2	53,0
K-07400758	G 1/2	35,5	59,2	53,0
K-07400759	G 1/2	36,3	59,2	53,0