


Unidirectional flow control valves with parallel male thread and plug connection, straight type, air restriction from tube to port

Характеристики

Рабочее давление	Max. 15 bar, coarse vacuum
Область температур	-20 °C to +80 °C
Рабочие среды	Compressed air and all gases or liquids that are compatible with the materials
рекомендуемые шланги	PU or PA (nylon)
Область применения	Air, vacuum
Уплотнительная поверхность	Parallel version: O-ring in housing, Conical version: thread coating
Материал	Plastic, Nickel plated brass
Прижимное кольцо	Plastic

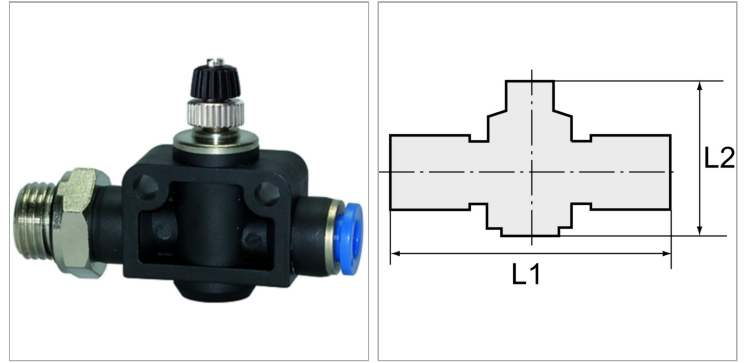

Указания

Прочие данные только по запросу.

Описание

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Артикул

Наименование	Резьба	L1	L2 макс.	L2 мин.
K-07400699	G 1/8	46,5	31,2	28,9
K-07400700	G 1/8	53,7	46,8	41,1
K-07400701	G 1/8	58,1	47,4	41,7
K-07400697	G 1/4	55,1	47,0	40,8
K-07400698	G 1/4	59,6	50,8	44,8
K-07400695	G 1/4	70,3	54,0	47,4
K-07400696	G 1/4	80,6	55,3	50,3
K-07400704	G 3/8	61,0	50,4	44,3
K-07400702	G 3/8	71,6	55,3	48,5
K-07400703	G 3/8	81,3	57,1	51,8
K-07400693	G 1/2	76,0	54,5	48,3
K-07400694	G 1/2	85,9	56,8	51,5