


Unidirectional flow control valves with outgoing air restriction, adjustable, angled, swivel type, parallel male thread with O-ring

Характеристики

Рабочее давление	Max. 10 bar
Область температур	-20 °C to +80 °C
Рабочие среды	Compressed air and all gases or liquids that are compatible with the materials
рекомендуемые шланги	PU or PA (nylon)
Область применения	Air, vacuum
Уплотнительная поверхность	Parallel version: O-ring in housing, Conical version: thread coating
Материал	Plastic, Nickel plated brass
Прижимное кольцо	Plastic

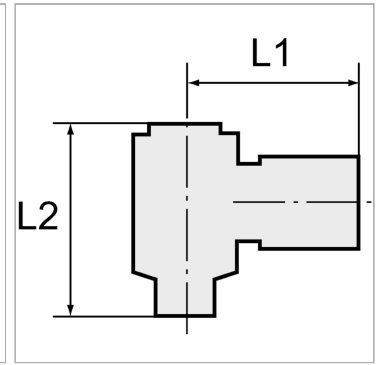

Указания

Прочие данные только по запросу.

Описание

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Артикул

Наименование	Резьба	L1	L2 мм.
K-07404633	M 5	20,0	23,0
K-07404634	M 5	21,5	23,0
K-07404642	G 1/8	23,0	31,5
K-07404643	G 1/8	23,0	31,5
K-07404644	G 1/8	26,5	31,5
K-07404639	G 1/4	25,0	38,3
K-07404640	G 1/4	25,0	38,3
K-07404641	G 1/4	29,0	38,3
K-07404638	G 1/4	31,0	38,3
K-07404647	G 3/8	27,0	43,0
K-07404648	G 3/8	30,5	43,0
K-07404645	G 3/8	32,0	43,0
K-07404646	G 3/8	35,0	43,0
K-07404637	G 1/2	33,0	49,0
K-07404635	G 1/2	34,5	49,0
K-07404636	G 1/2	36,5	49,0