


### Характеристики

<b>Область применения</b>	welding equipment welding robots welding machines Welding Related areas
<b>Цвет</b>	черный
<b>Температура min.</b>	-40 °C
<b>Температура макс.</b>	90 °C

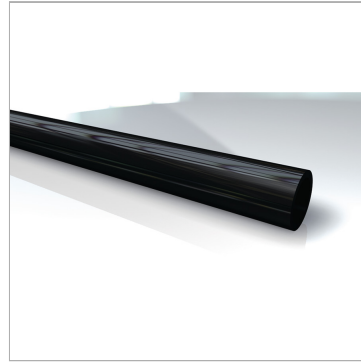

### Дополнительная информация

- Flame retardant according to UL94 V2/V0 - Welding-spark resistant - Halogen-free according to EN 50267-2-1 (complies with IEC 60754-1) - LABS free (free from paint-adhesion inhibiting substances) - UV-resistant - can be used with drag chains - flexible - resistant to bending - very good wear resistance - plasticiser free

### Артикул

Наименование	Внутренний Ø ном.	Толщина стенок	Наружный Ø ном.	max. Betriebsdruck bei 23°C	Мин. радиус изгиба
<a href="#">K-07101327</a>	-	-	-	-	-
<a href="#">K-07101328</a>	4,0	1,0	6,0	20	8
<a href="#">K-07101329</a>	4,0	2,0	8,0	23	9
<a href="#">K-07101330</a>	6,0	2,0	10,0	21	15
<a href="#">K-07101331</a>	8,0	2,0	12,0	18	26
<a href="#">K-07101332</a>	10,0	2,0	14,0	13	38
<a href="#">K-07101333</a>	11,0	2,5	16,0	15	65