

Характеристики

Свойства	<p>Maximum suction capacity with minimum compressed air consumption</p> <p>Minimum size, low weight</p> <p>Vacuum generator with a single nozzle, available in six power ratings, with a high maximum vacuum value (85%)</p> <p>Connection of compressed air and vacuum with push-in coupling</p> <p>Basic housing with connection facility for a vacuum switch</p> <p>Various power ratings for optimised air consumption</p>
-----------------	--


Применение	<p>For universal use in handling systems with very high dynamic movements</p> <p>Handling all kinds of air-tight components</p> <p>For use in separation systems where space is restricted.</p> <p>Construction of ejector blocks for centralised or decentralised individual control of suction pads.</p>
-------------------	--

Система форсунок	Brass
-------------------------	-------

Соединение	Push-in coupling
-------------------	------------------

Глушитель	Plastic
------------------	---------

Основные части	Impact-resistant plastic
-----------------------	--------------------------

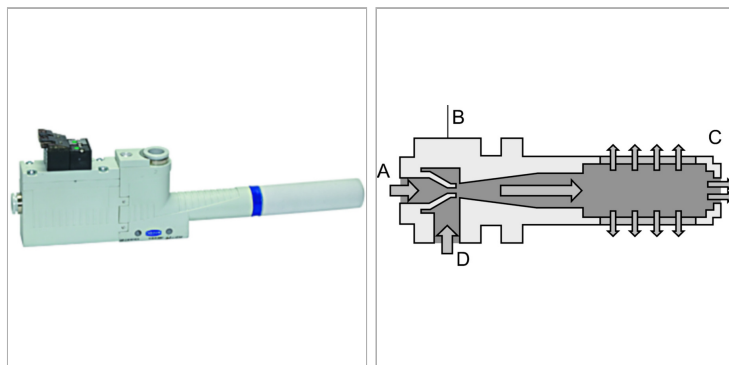

Указания

Прочие данные только по запросу.

Описание

Purely pneumatic vacuum ejector that operates on the Venturi principle. Compressed air enters the ejector at A and flows through the nozzle B. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet D. This air and the driving air leave the ejector via the silencer C.

Артикул

Наименование	Размер форсунки	Состояние покоя всасывающего клапана
K-07450119	01	NO
K-07450121	02	NO
K-07450123	02	NO
K-07450125	03	NO