

Характеристики

Свойства

No moving parts, which means no wear and no maintenance

Vacuum generator with high maximum vacuum level (85% vacuum)

ultra small footprint, suitable for confined spaces

minimal air consumption


Применение

by screwing / plugging into the distribution beam direct attachment to the suction pad for handling various workpieces

Корпус plastic (Typ SLP)

Система форсунок Brass (type VR)

Соединение thread connector

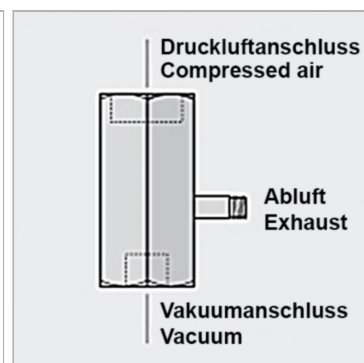

Указания

Прочие данные только по запросу.

Описание

For vacuum generation directly at the point of use. For direct installation between the suction pad and the compressed air supply. Purely pneumatic vacuum generator that operates on the Venturi principle. Compressed air enters the ejector and flows through a nozzle. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet. This air and the driving air leave the ejector and enter the atmosphere via the exhaust air outlet.

Артикул

Наименование	Длина	Размер форсунки	Расход воздуха при всасывании	макс. скорость откачки	Подключение к системе вытяжной вентиляции	Рабочее давление
K-07450127	57,0	01	13,0	8,0	-	4,5
K-07450128	57,0	01	25,0	16,0	-	4,5