


Характеристики

Свойства	No moving parts, which means no wear and no maintenance Vacuum generator with high maximum vacuum level (85% vacuum) ultra small footprint, suitable for confined spaces minimal air consumption
Применение	by screwing / plugging into the distribution beam direct attachment to the suction pad for handling various workpieces
Корпус	Aluminium eloxed (type VR)
Система форсунок	Brass (type VR)
Соединение	Вставное соединение

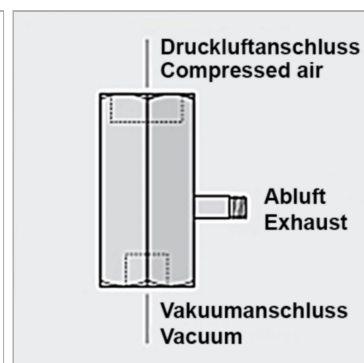

Указания

Прочие данные только по запросу.

Описание

For vacuum generation directly at the point of use. For direct installation between the suction pad and the compressed air supply. Purely pneumatic vacuum generator that operates on the Venturi principle. Compressed air enters the ejector and flows through a nozzle. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet. This air and the driving air leave the ejector and enter the atmosphere via the exhaust air outlet.

Артикул

Наименование	Длина	Размер форсунки	Расход воздуха при всасывании	макс. скорость откачки	Рабочее давление
K-07450129	35,0	01	21,0	14,0	5,0
K-07450130	35,0	01	36,0	21,0	5,0