


Multiple union elbows with outer hex, 2 outlets, swivel type, parallel male thread with O-ring

Обновлено: 05.04.24

Характеристики

Рабочее давление	Max. 15 bar, coarse vacuum
Область температур	-20 °C to +80 °C
Рабочие среды	Compressed air and all gases or liquids that are compatible with the materials
рекомендуемые шланги	PU or PA (nylon)
Область применения	Air, vacuum
Уплотнительная поверхность	Parallel version: O-ring in housing
Материал	Plastic, Nickel plated brass
Прижимное кольцо	Plastic

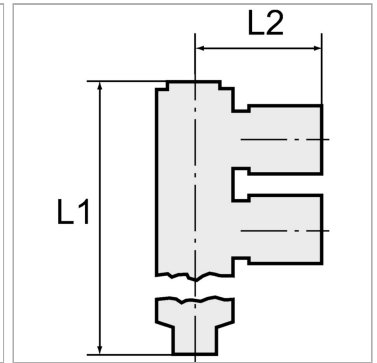

Указания

Прочие данные только по запросу.

Описание

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Артикул

Наименование	Внутренний шестиграннык	Резьба	L1	L2
K-07400601	4,0	G 1/8	43,8	22,5
K-07400602	4,0	G 1/8	43,8	21,5
K-07400603	4,0	G 1/8	43,8	24,5
K-07404272	6,0	G 1/4	58,0	24,7
K-07400599	6,0	G 1/4	58,0	23,5
K-07400600	6,0	G 1/4	58,0	26,5
K-07400597	6,0	G 1/4	58,0	29,9
K-07400598	6,0	G 1/4	58,0	30,8
K-07404273	8,0	G 3/8	59,5	24,5
K-07404274	8,0	G 3/8	59,5	23,6
K-07400606	8,0	G 3/8	60,7	28,5
K-07400604	8,0	G 3/8	60,7	31,9
K-07400605	8,0	G 3/8	60,7	32,8
K-07404271	8,0	G 1/2	64,2	28,5
K-07404269	8,0	G 1/2	64,2	34,7
K-07404270	8,0	G 1/2	64,2	35,4