


## Multiple union elbows with inner hex, 3 outlets, swivel type, parallel male thread with O-ring

Обновлено: 05.04.24

### Характеристики

<b>Рабочее давление</b>	Max. 15 bar, coarse vacuum
<b>Область температур</b>	-20 °C to +80 °C
<b>Рабочие среды</b>	Compressed air and all gases or liquids that are compatible with the materials
<b>рекомендуемые шланги</b>	PU or PA (nylon)
<b>Область применения</b>	Air, vacuum
<b>Уплотнительная поверхность</b>	Parallel version: O-ring in housing
<b>Материал</b>	Plastic, Nickel plated brass
<b>Прижимное кольцо</b>	Plastic

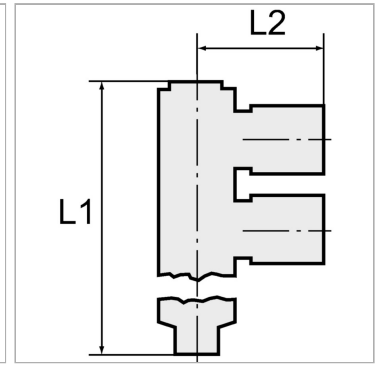

### Указания

Прочие данные только по запросу.

### Описание

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

### Артикул

Наименование	Внутренний шестиграннык	Резьба	L1	L2
<a href="#">K-07400611</a>	4,0	G 1/8	59,1	22,5
<a href="#">K-07400612</a>	4,0	G 1/8	59,1	21,5
<a href="#">K-07400613</a>	4,0	G 1/8	59,1	24,5
<a href="#">K-07400609</a>	6,0	G 1/4	79,5	23,5
<a href="#">K-07400610</a>	6,0	G 1/4	79,5	26,5
<a href="#">K-07400607</a>	6,0	G 1/4	79,5	29,9
<a href="#">K-07400608</a>	6,0	G 1/4	79,5	30,8
<a href="#">K-07400616</a>	8,0	G 3/8	82,2	28,5
<a href="#">K-07400614</a>	8,0	G 3/8	82,2	31,9
<a href="#">K-07400615</a>	8,0	G 3/8	82,2	32,8