


K-L-MEHRFACHVERT 6 DR AGR-K

Multiple union elbows with outer hex, 6 outlets, swivel type, conical male thread, coated

Обновлено: 05.07.24

Характеристики

Рабочее давление	Max. 15 bar, coarse vacuum
Область температур	-20 °C to +80 °C
Рабочие среды	Compressed air and all gases or liquids that are compatible with the materials
рекомендуемые шланги	PU or PA (nylon)
Область применения	Air, vacuum
Уплотнительная поверхность	Conical version: thread coating
Материал	Plastic, Nickel plated brass
Прижимное кольцо	Plastic

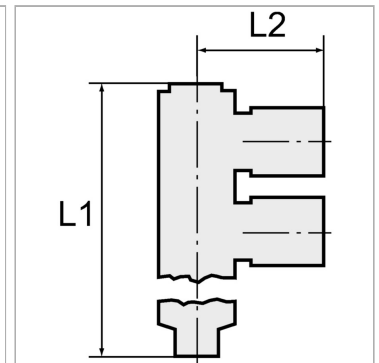

Указания

Прочие данные только по запросу.

Описание

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Артикул

Наименование	Резьба	L1	L2
K-07404370	R 1/8	52,0	24,0
K-07404371	R 1/8	56,5	28,5
K-07404368	R 1/4	54,0	24,0
K-07404369	R 1/4	58,5	28,5
K-07404367	R 1/4	71,5	33,7
K-07404372	R 3/8	72,5	33,7
K-07404373	R 3/8	72,5	37,5
K-07404366	R 1/2	75,5	37,5