


K-L-MEHRFACHVERT 6 DR AGR OR

Multiple union elbows with outer hex, 6 outlets, swivel type, parallel male thread with O-ring

Обновлено: 05.07.24

Характеристики

Рабочее давление	Max. 15 bar, coarse vacuum
Область температур	-20 °C to +80 °C
Рабочие среды	Compressed air and all gases or liquids that are compatible with the materials
рекомендуемые шланги	PU or PA (nylon)
Область применения	Air, vacuum
Уплотнительная поверхность	Parallel version: O-ring in housing
Материал	Plastic, Nickel plated brass
Прижимное кольцо	Plastic

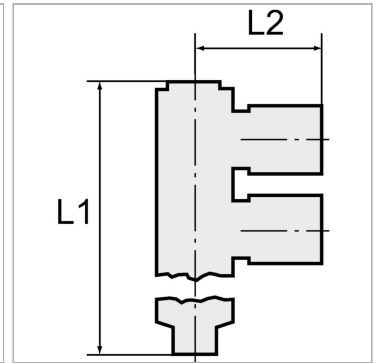

Указания

Прочие данные только по запросу.

Описание

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Артикул

Наименование	Резьба	L1	L2
K-07404362	G 1/8	54,5	24,0
K-07404363	G 1/8	59,0	28,5
K-07404360	G 1/4	56,5	24,0
K-07404361	G 1/4	61,0	28,5
K-07404359	G 1/4	61,0	33,7
K-07404364	G 3/8	74,0	33,7
K-07404365	G 3/8	75,0	37,5
K-07404358	G 1/2	76,5	37,5