


Male branch tees, angled plug connections, swivel type, parallel male thread with O-ring

Обновлено: 05.04.24

Характеристики

Рабочее давление	Max. 15 bar, coarse vacuum
Область температур	-20 °C to +80 °C
Рабочие среды	Compressed air and all gases or liquids that are compatible with the materials
рекомендуемые шланги	PU or PA (nylon)
Область применения	Air, vacuum
Уплотнительная поверхность	Parallel version: O-ring in housing
Материал	Plastic, Nickel plated brass
Прижимное кольцо	Plastic

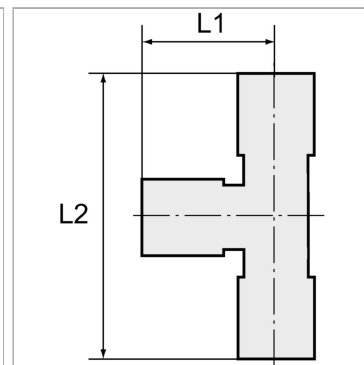

Указания

Прочие данные только по запросу.

Описание

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Артикул

Наименование	Резьба	L1	L2
K-07400218	M 5	18,0	37,2
K-07400219	M 5	20,1	40,2
K-07400232	G 1/8	18,0	35,1
K-07400233	G 1/8	20,1	38,1
K-07400234	G 1/8	22,7	45,2
K-07400230	G 1/8	26,9	51,3
K-07400231	G 1/8	29,3	54,9
K-07400227	G 1/4	18,0	35,1
K-07400228	G 1/4	20,1	38,1
K-07400229	G 1/4	22,7	41,2
K-07400225	G 1/4	26,9	52,3
K-07400226	G 1/4	29,3	55,9
K-07400238	G 3/8	20,1	39,2
K-07400239	G 3/8	22,7	42,3
K-07400235	G 3/8	26,9	49,3
K-07400236	G 3/8	29,3	52,9
K-07400237	G 3/8	34,5	66,2
K-07400223	G 1/2	20,1	43,6
K-07400224	G 1/2	22,7	44,7
K-07400220	G 1/2	26,9	51,2
K-07400221	G 1/2	29,3	54,8
K-07400222	G 1/2	34,5	62,9