


Distributors with male thread, 4 outlets, swivel type, parallel male thread with O-ring (max. 10 bar)

Обновлено: 05.08.24

Характеристики

Рабочее давление	Max. 10 bar
Область температур	-20 °C to +80 °C
Рабочие среды	Compressed air and all gases or liquids that are compatible with the materials
рекомендуемые шланги	PU or PA (nylon)
Область применения	Air, vacuum
Уплотнительная поверхность	Parallel version: O-ring in housing
Материал	Plastic, Nickel plated brass
Прижимное кольцо	Plastic

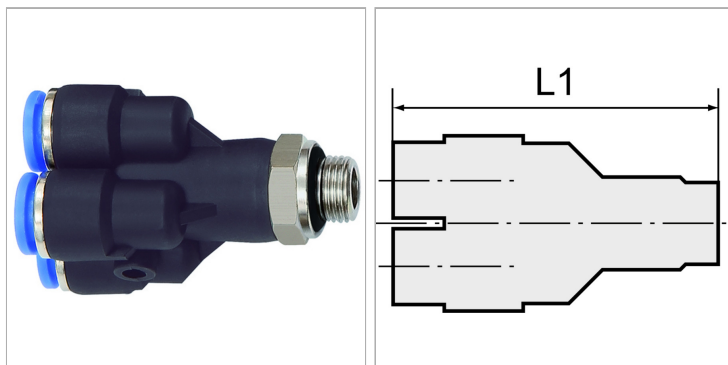

Указания

Прочие данные только по запросу.

Описание

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Артикул

Наименование	Резьба	L1
K-07404343	G 1/8	43,0
K-07404344	G 1/8	46,5
K-07404341	G 1/4	45,5
K-07404342	G 1/4	49,0