


Характеристики

Рабочая температура	-20 °C to +70 °C in air; +1 °C to +70 °C in water
Материал	Acetalpolymerisat (POM)
Уплотнение	Нитрильный каучук
Рабочее давление	0 - 16 bar (4 - 8 mm); 0 - 10 bar (10 - 28 mm)

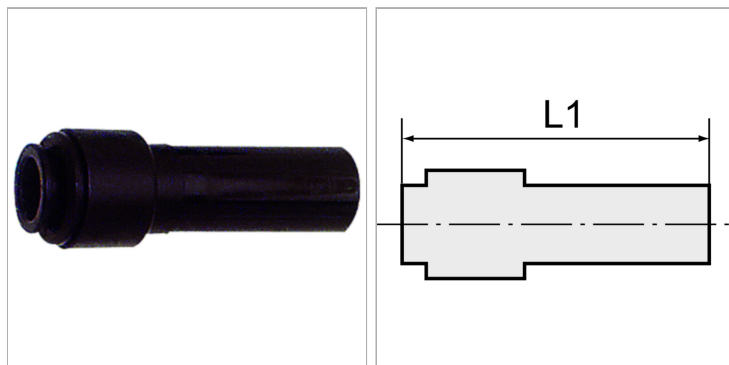

Указания

Прочие данные только по запросу.

Описание

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Артикул

Наименование	Штуцеры	L1
K-07402891	12	46,7
K-07402892	12	50,9
K-07402893	15	61,2
K-07402894	15	61,2
K-07402895	18	71,7
K-07402896	22	72,7
K-07402897	22	71,8
K-07402898	28	81,4
K-07402899	28	82,6