


Характеристики

Рабочая температура	Max. +20 °C
Материал	Polypropylene (PP)
Уплотнение	Нитрильный каучук
Рабочее давление	on request

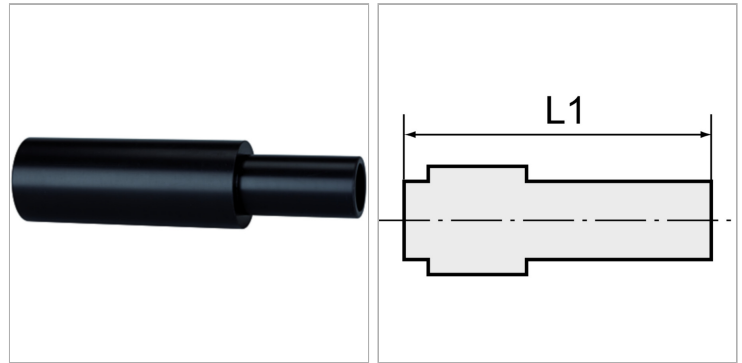

Указания

Прочие данные только по запросу.

Описание

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Артикул

Наименование	Штуцеры	L1
K-07402900	32	127,0
K-07402901	32	133,3