


## Weld-on sleeve 16 made of black steel ST 37-2, DIN 2986 with continuous thread

Обновлено: 04.30.24

### Характеристики

Рабочее давление	Max. 50 bar
Соединительная резьба	nach ISO 7-1
Материал	black steel ST 37-2

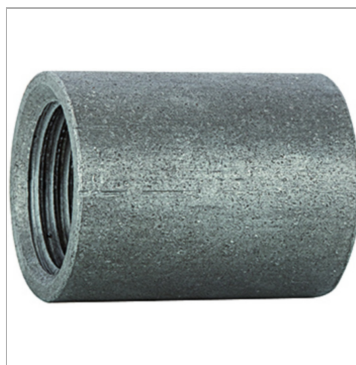

### Указания

Прочие данные только по запросу.

### Описание

The steel fittings are made of tubular steel to DIN 2441 and boast good resistance to mechanical stresses. Hot dip galvanised steel fittings are completely coated with a layer of pure zinc and are therefore suitable for drinking water. They are also protected against rust. They are used in pipe construction, plumbing and gas installations as well as a wide range of industrial applications, especially in conjunction with the popular malleable iron series.

### Артикул

Наименование	Длина	Резьба
<a href="#">K-07403530</a>	25,0	R 1/4
<a href="#">K-07403533</a>	26,0	R 3/8
<a href="#">K-07403529</a>	34,0	R 1/2
<a href="#">K-07403532</a>	36,0	R 3/4
<a href="#">K-07403526</a>	43,0	R 1
<a href="#">K-07403528</a>	48,0	R 1 1/4
<a href="#">K-07403527</a>	48,0	R 1 1/2
<a href="#">K-07403531</a>	56,0	R 2
<a href="#">K-07405036</a>	65,0	R 2 1/2
<a href="#">K-07405037</a>	71,0	R 3