


Характеристики

Особые признаки	<p>very good adaptation to oblique workpiece surfaces</p> <p>automatic Rückstellung in die Ausgangslage</p> <p>vacuum-tight design with integrated protection against damage</p>
Применение	<p>For handling of workpieces with sloping using large-area vacuum gripper</p> <p>Handling of large plates that can sag when lifting</p> <p>In combination with spring plungers to compensate height-differences and Unevenness</p>

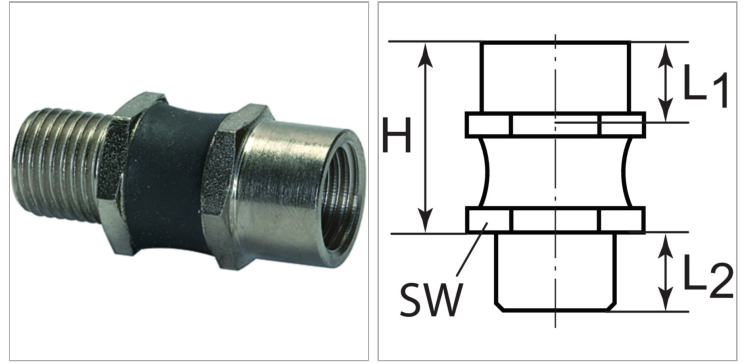

Указания

Прочие данные только по запросу.

Описание

Flexible suction pad mounting. By flexing in all directions, this mounting allows the suction pad to better adapt itself to sloping workpieces.

Артикул

Наименование	Момент изгиба	Вертикальная нагрузка	Резьба 1 внутренняя	Резьба 2 наружная	H	L1	L2	SW	Угол W
K-07450147	8,0	500	G 1/4	M 10 x 1,25	27,0	10,5	8,0	17	12
K-07450148	10,0	750	G 1/4	G 1/4	27,0	12,0	12,0	17	12