


### Характеристики

|                    |                |
|--------------------|----------------|
| Область температур | 5 °C bis 80 °C |
| Рабочее давление   | max. 6 bar     |

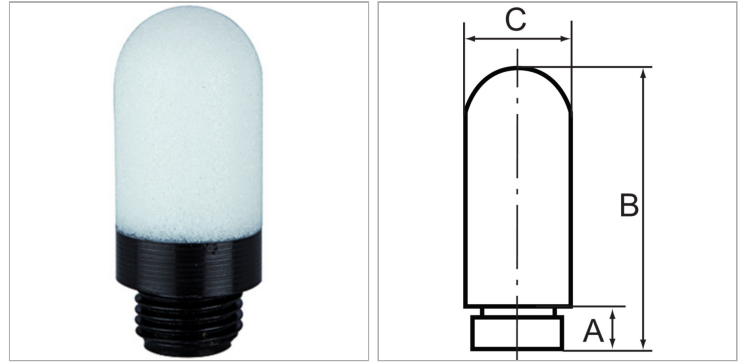

### Указания

Прочие данные только по запросу. Important: The air flowing through the silencer is cooled down. at temperatures below zero, the moisture in the air can freeze, causing the pores of the silencer to close up.

### Артикул

| Наименование               | Резьба | A    | B     | C    |
|----------------------------|--------|------|-------|------|
| <a href="#">K-07404690</a> | M 5    | 5,0  | 25,0  | 7,0  |
| <a href="#">K-07404061</a> | G 1/8  | 7,0  | 32,0  | 13,0 |
| <a href="#">K-07404062</a> | G 1/4  | 8,0  | 39,0  | 17,0 |
| <a href="#">K-07404063</a> | G 3/8  | 11,0 | 65,0  | 25,0 |
| <a href="#">K-07404064</a> | G 1/2  | 11,5 | 70,0  | 25,0 |
| <a href="#">K-07404065</a> | G 3/4  | 15,5 | 138,0 | 37,0 |
| <a href="#">K-07404066</a> | G 1    | 19,5 | 158,0 | 48,0 |