


Характеристики

Область температур	-40 °C to +90 °C
--------------------	------------------

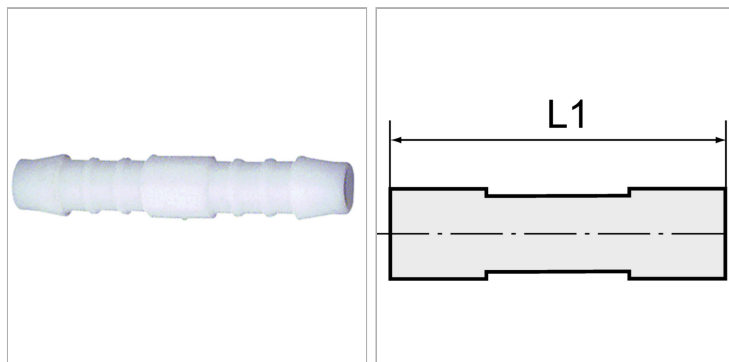

Указания

Прочие данные только по запросу.

Описание

Lightweight tube connectors distinguished by high strength, toughness, resistance to abrasion and impact resistance. Resistant to: Acetone, benzene, butane, alcohols, diesel fuels, crude oil, natural gas, ethanol, fruit juices, glycerine, fuel oil, hydraulic fluids, aliphatic ketones, carbon dioxide, carbonic acid, engine oils, methanol, propane, liquefied gas, lubricating oils, lubricating greases, town gas, washing liquor and water.

Артикул

Наименование	макс. допустимое избыточное давление	L1
K-07401700	10	25,0
K-07401701	10	35,0
K-07401702	10	45,0
K-07401703	10	49,0
K-07401704	10	56,0
K-07401705	10	63,0
K-07401706	10	66,5
K-07401707	10	73,0
K-07401708	10	75,0
K-07401709	10	76,0
K-07404656	10	95,0