


### Характеристики

<b>Рабочая температура</b>	-20 °C to +80 °C
<b>Рабочее давление</b>	Max. 16 bar
<b>Материал</b>	Никелированная латунь
<b>Зажимное кольцо</b>	Stainless steel
<b>Прижимное кольцо</b>	Hostaform

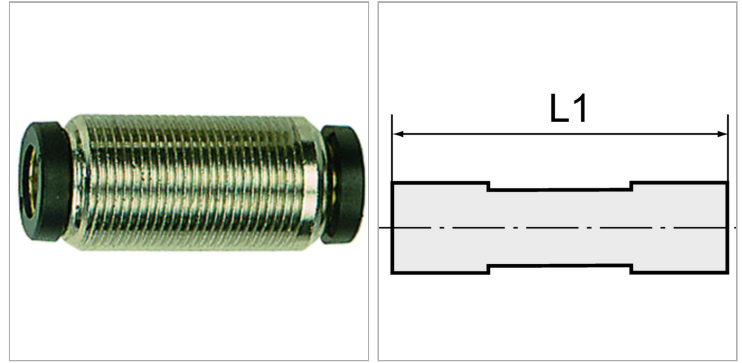

### Указания

Прочие данные только по запросу.

### Описание

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

### Артикул

Наименование	Резьба	L1
<a href="#">K-07402518</a>	M 8 x 0,75	18,4
<a href="#">K-07402519</a>	M 11 x 1	30,6
<a href="#">K-07402520</a>	M 14 x 1	33,5
<a href="#">K-07402521</a>	M 13 x 1	33,0
<a href="#">K-07402522</a>	M 15 x 1	35,7
<a href="#">K-07402523</a>	M 17 x 1	39,2
<a href="#">K-07402524</a>	M 20 x 1	39,7
<a href="#">K-07402525</a>	M 24 x 1	45,9