


### Характеристики

<b>Рабочая температура</b>	-20 °C to +80 °C
<b>Рабочее давление</b>	Max. 16 bar
<b>Материал</b>	Никелированная латунь
<b>Зажимное кольцо</b>	Stainless steel
<b>Прижимное кольцо</b>	Hostaform

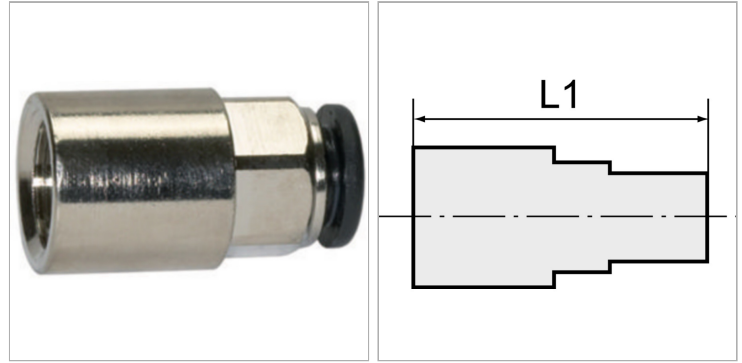

### Указания

Прочие данные только по запросу.

### Описание

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

### Артикул

Наименование	Резьба	L1
<a href="#">K-07402506</a>	M 5	15,7
<a href="#">K-07402512</a>	G 1/8	26,2
<a href="#">K-07402513</a>	G 1/8	27,5
<a href="#">K-07402514</a>	G 1/8	27,1
<a href="#">K-07402515</a>	G 1/8	28,1
<a href="#">K-07402509</a>	G 1/4	28,6
<a href="#">K-07404715</a>	G 1/4	29,5
<a href="#">K-07402510</a>	G 1/4	29,3
<a href="#">K-07402511</a>	G 1/4	30,0
<a href="#">K-07402508</a>	G 1/4	31,8
<a href="#">K-07402516</a>	G 3/8	36,8
<a href="#">K-07402517</a>	G 3/8	37,0
<a href="#">K-07402507</a>	G 1/2	40,5