


Характеристики

Рабочее давление	Max. 15 bar, coarse vacuum
Область температур	-20 °C to +80 °C
Рабочие среды	Compressed air and all gases or liquids that are compatible with the materials
рекомендуемые шланги	PU or PA (nylon)
Область применения	Air, vacuum
Материал	Plastic, Nickel plated brass
Прижимное кольцо	Plastic

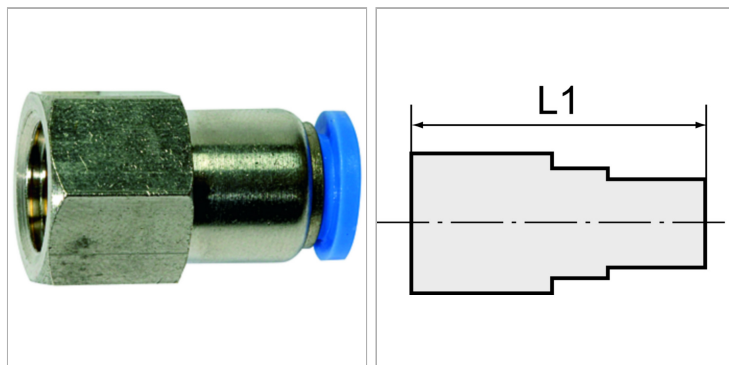

Указания

Прочие данные только по запросу.

Описание

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Артикул

Наименование	Резьба	L1
K-07400120	M 5	21,3
K-07400121	M 5	22,2
K-07400131	G 1/8	23,8
K-07400132	G 1/8	25,2
K-07400133	G 1/8	27,1
K-07404128	G 1/8	28,5
K-07400128	G 1/4	26,8
K-07400129	G 1/4	28,2
K-07400130	G 1/4	30,1
K-07400126	G 1/4	32,2
K-07400127	G 1/4	34,6
K-07400136	G 3/8	29,2
K-07400137	G 3/8	31,1
K-07400134	G 3/8	33,4
K-07400135	G 3/8	35,6
K-07400124	G 1/2	31,2
K-07400125	G 1/2	33,1
K-07400122	G 1/2	35,2
K-07400123	G 1/2	37,6
K-07404127	G 1/2	39,7