


Характеристики

| | |
|-----------------------------|--|
| Рабочее давление | Max. 15 bar, coarse vacuum |
| Область температур | -20 °C to +80 °C |
| Рабочие среды | Compressed air and all gases or liquids that are compatible with the materials |
| рекомендуемые шланги | PU or PA (nylon) |
| Область применения | Air, vacuum |
| Материал | Plastic, Nickel plated brass |
| Прижимное кольцо | Plastic |

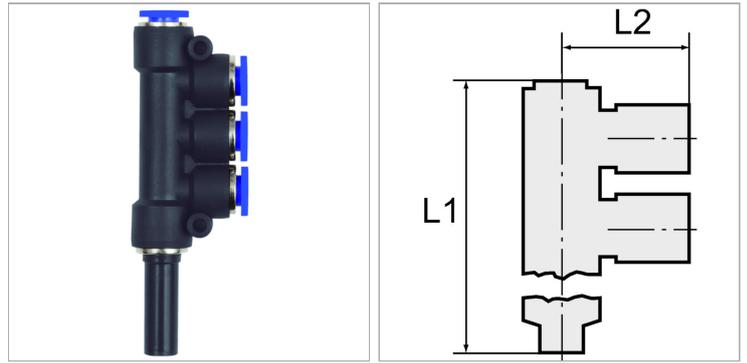

Указания

Прочие данные только по запросу.

Описание

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Артикул

| Наименование | Вставной ниппель | L1 | L2 |
|----------------------------|------------------|-------|------|
| K-07404354 | 6 | 81,0 | 22,7 |
| K-07404355 | 8 | 104,5 | 24,7 |
| K-07404356 | 8 | 106,0 | 24,7 |
| K-07404357 | 10 | 109,5 | 27,2 |