


### Характеристики

<b>Рабочая температура</b>	-20 °C to +80 °C
<b>Рабочее давление</b>	Max. 16 bar
<b>Материал</b>	Никелированная латунь
<b>Зажимное кольцо</b>	Stainless steel
<b>Прижимное кольцо</b>	Hostaform

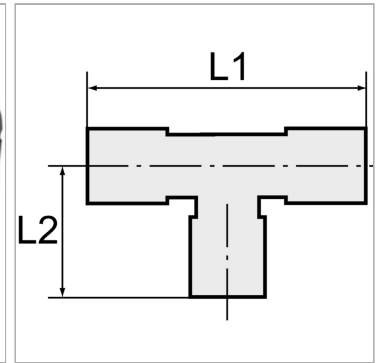

### Указания

Прочие данные только по запросу.

### Описание

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

### Артикул

Наименование	Резьба	L1	L2
<a href="#">K-07402718</a>	R 1/8	37,2	19,8
<a href="#">K-07402719</a>	R 1/8	43,8	19,8
<a href="#">K-07402720</a>	R 1/8	50,8	19,8
<a href="#">K-07402715</a>	R 1/4	37,2	22,6
<a href="#">K-07402716</a>	R 1/4	43,8	22,6
<a href="#">K-07402717</a>	R 1/4	50,8	23,6
<a href="#">K-07402714</a>	R 1/4	54,4	26,3
<a href="#">K-07402722</a>	R 3/8	47,2	27,1
<a href="#">K-07402721</a>	R 3/8	54,4	27,1