


Характеристики

Рабочая температура	-20 °C to +70 °C in air; +1 °C to +70 °C in water
Материал	Acetalpolymerisat (POM)
Уплотнение	Нитрильный каучук
Рабочее давление	0 - 16 bar (4 - 8 mm); 0 - 10 bar (10 - 28 mm)

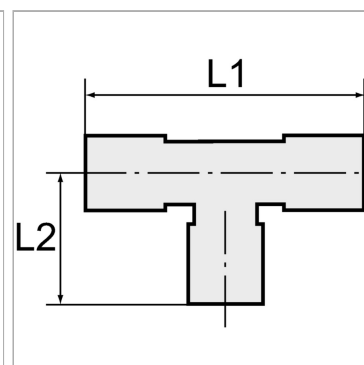

Указания

Прочие данные только по запросу.

Описание

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Артикул

Наименование	L1	L2
K-07402863	37,1	18,5
K-07402864	36,9	18,4
K-07402865	41,0	20,5
K-07402866	44,0	22,0
K-07402867	52,6	26,3
K-07402868	66,4	33,2
K-07402869	76,8	38,4
K-07402870	90,6	45,3
K-07402871	99,3	49,6
K-07402872	126,2	63,1