


## Male branch tees, conical male thread acc. to ISO 7-1

Обновлено: 04.30.24

### Характеристики

Диапазон давлений	Max. 60 bar
Температура	Max. 150 °C
Материал	Никелированная латунь

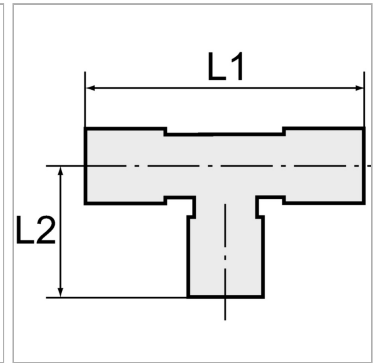

### Указания

Прочие данные только по запросу.

### Артикул

Наименование	Резьба	L1	L2	SW1
<a href="#">K-07401983</a>	R 1/8	44,0	16,0	10
<a href="#">K-07401984</a>	R 1/8	46,0	16,0	12
<a href="#">K-07401985</a>	R 1/8	48,0	17,0	14
<a href="#">K-07401986</a>	R 1/4	46,0	20,0	12
<a href="#">K-07401987</a>	R 1/4	48,0	20,0	14
<a href="#">K-07401988</a>	R 1/4	64,0	23,5	19
<a href="#">K-07401989</a>	R 3/8	54,0	24,0	14
<a href="#">K-07401990</a>	R 3/8	64,0	24,0	19
<a href="#">K-07401991</a>	R 3/8	69,0	25,5	22
<a href="#">K-07401992</a>	R 1/2	69,0	28,5	22
<a href="#">K-07401993</a>	R 1/2	76,0	30,0	27
<a href="#">K-07401994</a>	R 1/2	88,0	34,0	32