


Характеристики

| | |
|----------------------------|---|
| Рабочая температура | -20 °C to +70 °C in air; +1 °C to +70 °C in water |
| Материал | Acetalpolymerisat (POM) |
| Уплотнение | Нитрильный каучук |
| Рабочее давление | 0 - 16 bar (4 - 8 mm); 0 - 10 bar (10 - 28 mm) |

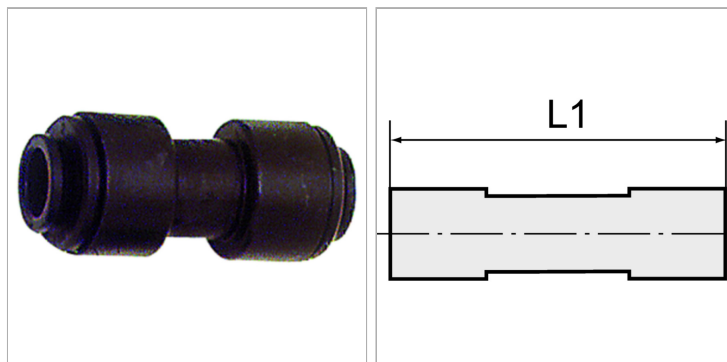

Указания

Прочие данные только по запросу.

Описание

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Артикул

| Наименование | L1 |
|----------------------------|------|
| K-07402841 | 33,6 |
| K-07402842 | 34,6 |
| K-07402843 | 36,9 |
| K-07402844 | 40,0 |
| K-07402845 | 43,9 |
| K-07402846 | 55,8 |
| K-07402847 | 62,0 |
| K-07402848 | 66,5 |
| K-07402849 | 72,2 |
| K-07402850 | 95,6 |