


Характеристики

Рабочая температура	-20 °C to +80 °C
Рабочее давление	Max. 16 bar
Материал	Никелированная латунь

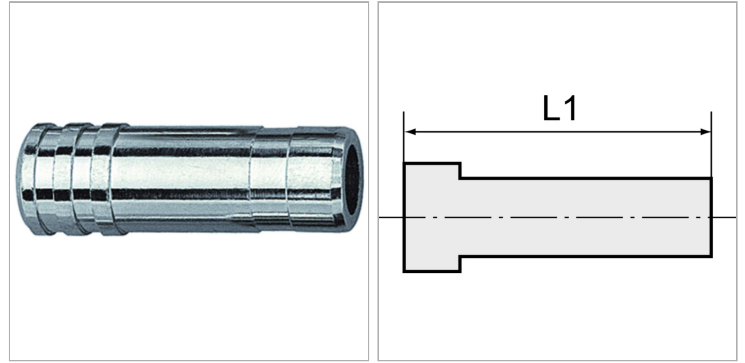

Указания

Прочие данные только по запросу.

Описание

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

Артикул

Наименование	Вставной ниппель	L1
K-07402628	3	20,0
K-07402629	4	27,0
K-07402630	5	27,0
K-07402633	6	29,8
K-07402636	8	33,6
K-07402637	10	36,8
K-07402638	12	39,0
K-07402640	14	39,5