


Характеристики

| | |
|----------------------------|---|
| Рабочая температура | -20 °C to +70 °C in air; +1 °C to +70 °C in water |
| Материал | Acetalpolymerisat (POM) |
| Уплотнение | Нитрильный каучук |
| Рабочее давление | 0 - 16 bar (4 - 8 mm); 0 - 10 bar (10 - 28 mm) |

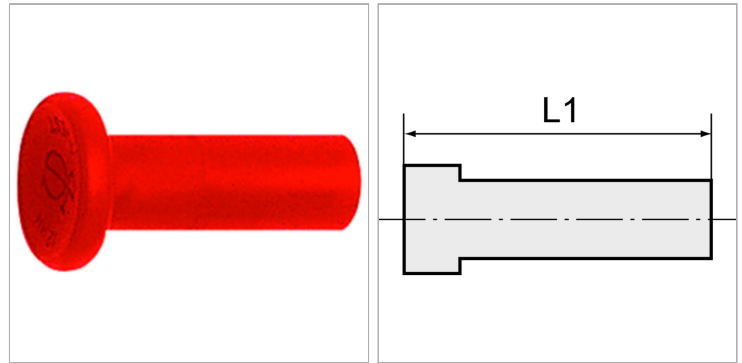

Указания

Прочие данные только по запросу.

Описание

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Артикул

| Наименование | Штуцеры | L1 | Цвет |
|----------------------------|---------|------|---------|
| K-07402911 | 4 | 28,0 | красный |
| K-07402912 | 5 | 28,0 | красный |
| K-07402913 | 6 | 30,0 | красный |
| K-07402914 | 8 | 31,0 | красный |
| K-07402915 | 10 | 36,5 | красный |
| K-07402916 | 12 | 38,5 | красный |
| K-07402917 | 15 | 45,0 | черный |
| K-07402918 | 18 | 41,5 | черный |
| K-07402919 | 22 | 45,0 | черный |
| K-07402920 | 28 | 56,0 | черный |