


Male stud elbows, polyamide, conical male thread acc. to ISO 7-1

Обновлено: 05.02.24

Характеристики

Область температур -40 °C to +90 °C

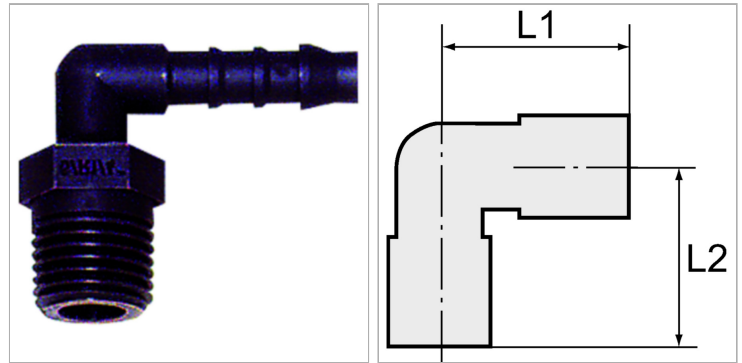

Указания

Прочие данные только по запросу.

Описание

Lightweight tube connectors distinguished by high strength, toughness, resistance to abrasion and impact resistance. Resistant to: Acetone, benzene, butane, alcohols, diesel fuels, crude oil, natural gas, ethanol, fruit juices, glycerine, fuel oil, hydraulic fluids, aliphatic ketones, carbon dioxide, carbonic acid, engine oils, methanol, propane, liquefied gas, lubricating oils, lubricating greases, town gas, washing liquor and water.

Артикул

Наименование	макс. допустимое избыточное давление	Резьба	L1	L2
K-07401684	10	R 1/8	16,0	21,0
K-07401685	10	R 1/8	21,0	28,5
K-07404654	10	R 1/8	23,0	33,0
K-07401686	10	R 1/4	25,0	21,0
K-07401687	10	R 1/4	26,0	28,5
K-07401688	10	R 1/4	27,5	33,0
K-07401689	10	R 1/4	30,0	38,0
K-07401690	10	R 3/8	27,0	28,5
K-07401691	10	R 3/8	31,0	36,0
K-07401692	10	R 3/8	30,0	38,0
K-07401693	10	R 3/8	31,0	40,5
K-07401694	10	R 1/2	36,0	36,0
K-07401695	10	R 1/2	36,0	40,5
K-07404655	10	R 3/4	42,8	45,5